



## **REQUEST FOR QUOTES**

### **2023 Norwood Young America Sealcoat Project**

City of Norwood Young America  
310 Elm Street W.  
P.O. Box 59  
Norwood Young America, MN 55368

## I. GENERAL PROVISIONS

- A. The City of Norwood Young America is accepting quotes for seal coating the designated city walking trails.
- B. Quotes submitted must provide complete information as indicated in this request. The deadline for submitting quotes is **Noon on Thursday, April 20<sup>th</sup>, 2023**. Quotes may be submitted in person, by mail, or by email if they are received by the deadline.

City of Norwood Young America  
Attention: Andrea Aukrust, City Administrator  
P.O. Box 59  
310 Elm St. W.  
Norwood Young America, MN 55368  
cityadmin@cityofnYA.com

- C. Questions and inquiries regarding this request should be directed to:

Randy Clay  
Public Utilities Lead-Streets & Parks  
(952) 212-0226  
rclay.cityofnYA@gmail.com

## II. Scope of Work

### A. Project Particulars

- Contractor is required to pre-sweep all areas and dispose of the material. All areas shall be swept clean with no foreign material stuck to the pavement. Low areas or depressions may need to be hand swept or blown clean.
- Contractor is required to cover and protect all castings on the road surface and ensure they are clean when completed.
- Contractor is required to supply and applicate the bituminous material.
- Contractor is required to supply and applicate the aggregate as specified.
- Contractor is required to roll the applied aggregate over the bituminous material immediately after application.
- Contractor is required to sweep up excess rock and remove it from areas 7-10 days after application.
- Contractor must coordinate with the city and allow time for blacktop patching and crack sealing. The crack sealing deadline is July 31, 2023, allowing time to sealcoat before the August 31, 2023, deadline.

### B. Specifications

- Bituminous material will be CRS-2P applied at a rate of .24-.26 gallons per square yard at a minimum temperature of 60 degrees Fahrenheit.
- Aggregate material will be FA-2 1/8" Trap Rock applied at a rate to adequately cover applied bituminous material.
- Areas will be rolled with pneumatic tire rollers with no greater speed than five mph while embedding rock.

- The road surface may be damp during completion but no ponding water.

#### C. Traffic Control

- Contractor is responsible for posting no parking signs a minimum of 24 hours before application and ensuring parking restrictions are followed prior to application.
- Contractor is responsible for providing adequate signage, barricades, and personnel to control vehicular and pedestrian traffic during application.
- Contractor is responsible for providing loose rock signage until streets are swept clean of loose rock.

#### D. Locations

- The included maps highlight the proposed locations below. Quantities are to be verified and submitted by the contractor.
  - Wilson Street:  
CR 33 to Progress: 370 ft x 39 ft = 14,430 sq. ft. = 1,603 sq. yd.  
CR 33 to Merger: 1,998 ft x 39 ft = 77,922 sq. ft. = 8,658 sq. yd.  
Total of Wilson Street: 10,261 sq. yd.
  - Hill Street:  
CR 33 to Progress: 393 ft x 39 ft = 15,327 sq. ft. = 1,703 sq. yd.  
CR 33 to Faxon: 2,337 ft x 39 ft = 91,143 sq. ft. = 10,127 sq. yd.  
Total of Hill Street: 11,830 sq. yd.
  - Railroad Street:  
Faxon to Tacoma: 3,220 ft x 25 ft = 80,500 sq. ft. = 8,944 sq. yd.
  - Sports Complex Parking Lot:  
4,172 sq. yd.
  - Legion Park Parking Lot:  
3,257 sq. yd.
- Contractor will be allowed to stockpile rock and sweepings at 123 Reform St. in the coordination of the project. All piles will be removed entirely by October 31, 2023.

### III. **Insurance**

The successful Contractor shall carry the following minimum insurance coverage limits and provide proof of such to the City. The City shall be listed as an Additional Insured.

Commercial General Liability per occurrence for bodily injury and property damage	\$1,000,000
Aggregate	\$2,000,000

Automobile Liability	\$1,000,000
Workers' Compensation and Employers' Liability	\$500,000

**IV. Project Completion**

The scope of work is to be completed by **August 31, 2023**.

**V. Contractor Warranty**

Contractor shall warrant their workmanship.

**VI. City Responsibilities**

City will notify property owners of project commencement when we are notified by the contractor two days before work.

**VII. Quote**

Quotes shall be provided as a whole dollar amount for the entire scope of work on the attached form. Quotes should also include the price per square yard.

**VIII. Right to Reject Quotes**

The City reserves the right to reject any and all quotes received.

**IX. Disclaimer**

The City of Norwood Young America shall not be liable for any costs incurred by a contractor responding to this request for quotes or any costs associated with discussions required to clarify items related to this quote.

## CONTRACTOR'S QUOTE

Company name: \_\_\_\_\_

Contact Person: \_\_\_\_\_

Title: \_\_\_\_\_

Address: \_\_\_\_\_

Phone Number: \_\_\_\_\_

Quote: \$ \_\_\_\_\_

Quote per square yard: \$ \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_




# CITY OF NORWOOD YOUNG AMERICA

## 2023 Seal Coating - Wilson Street

Map Date: 4/2/2023

*\*Crack Filling & Seal Coating Map*




2023 Road Maintenance



**CITY OF NORWOOD YOUNG AMERICA**  
**2023 Seal Coating - Hill Street**

Map Date: 4/12/2023



\* Crack Filling & Seal Coating Map





**CITY OF NORWOOD YOUNG AMERICA**  
**2023 Seal Coating - Railroad Street**  
\*Crack Filling & Seal Coating Map


Map Date: 4/9/2023

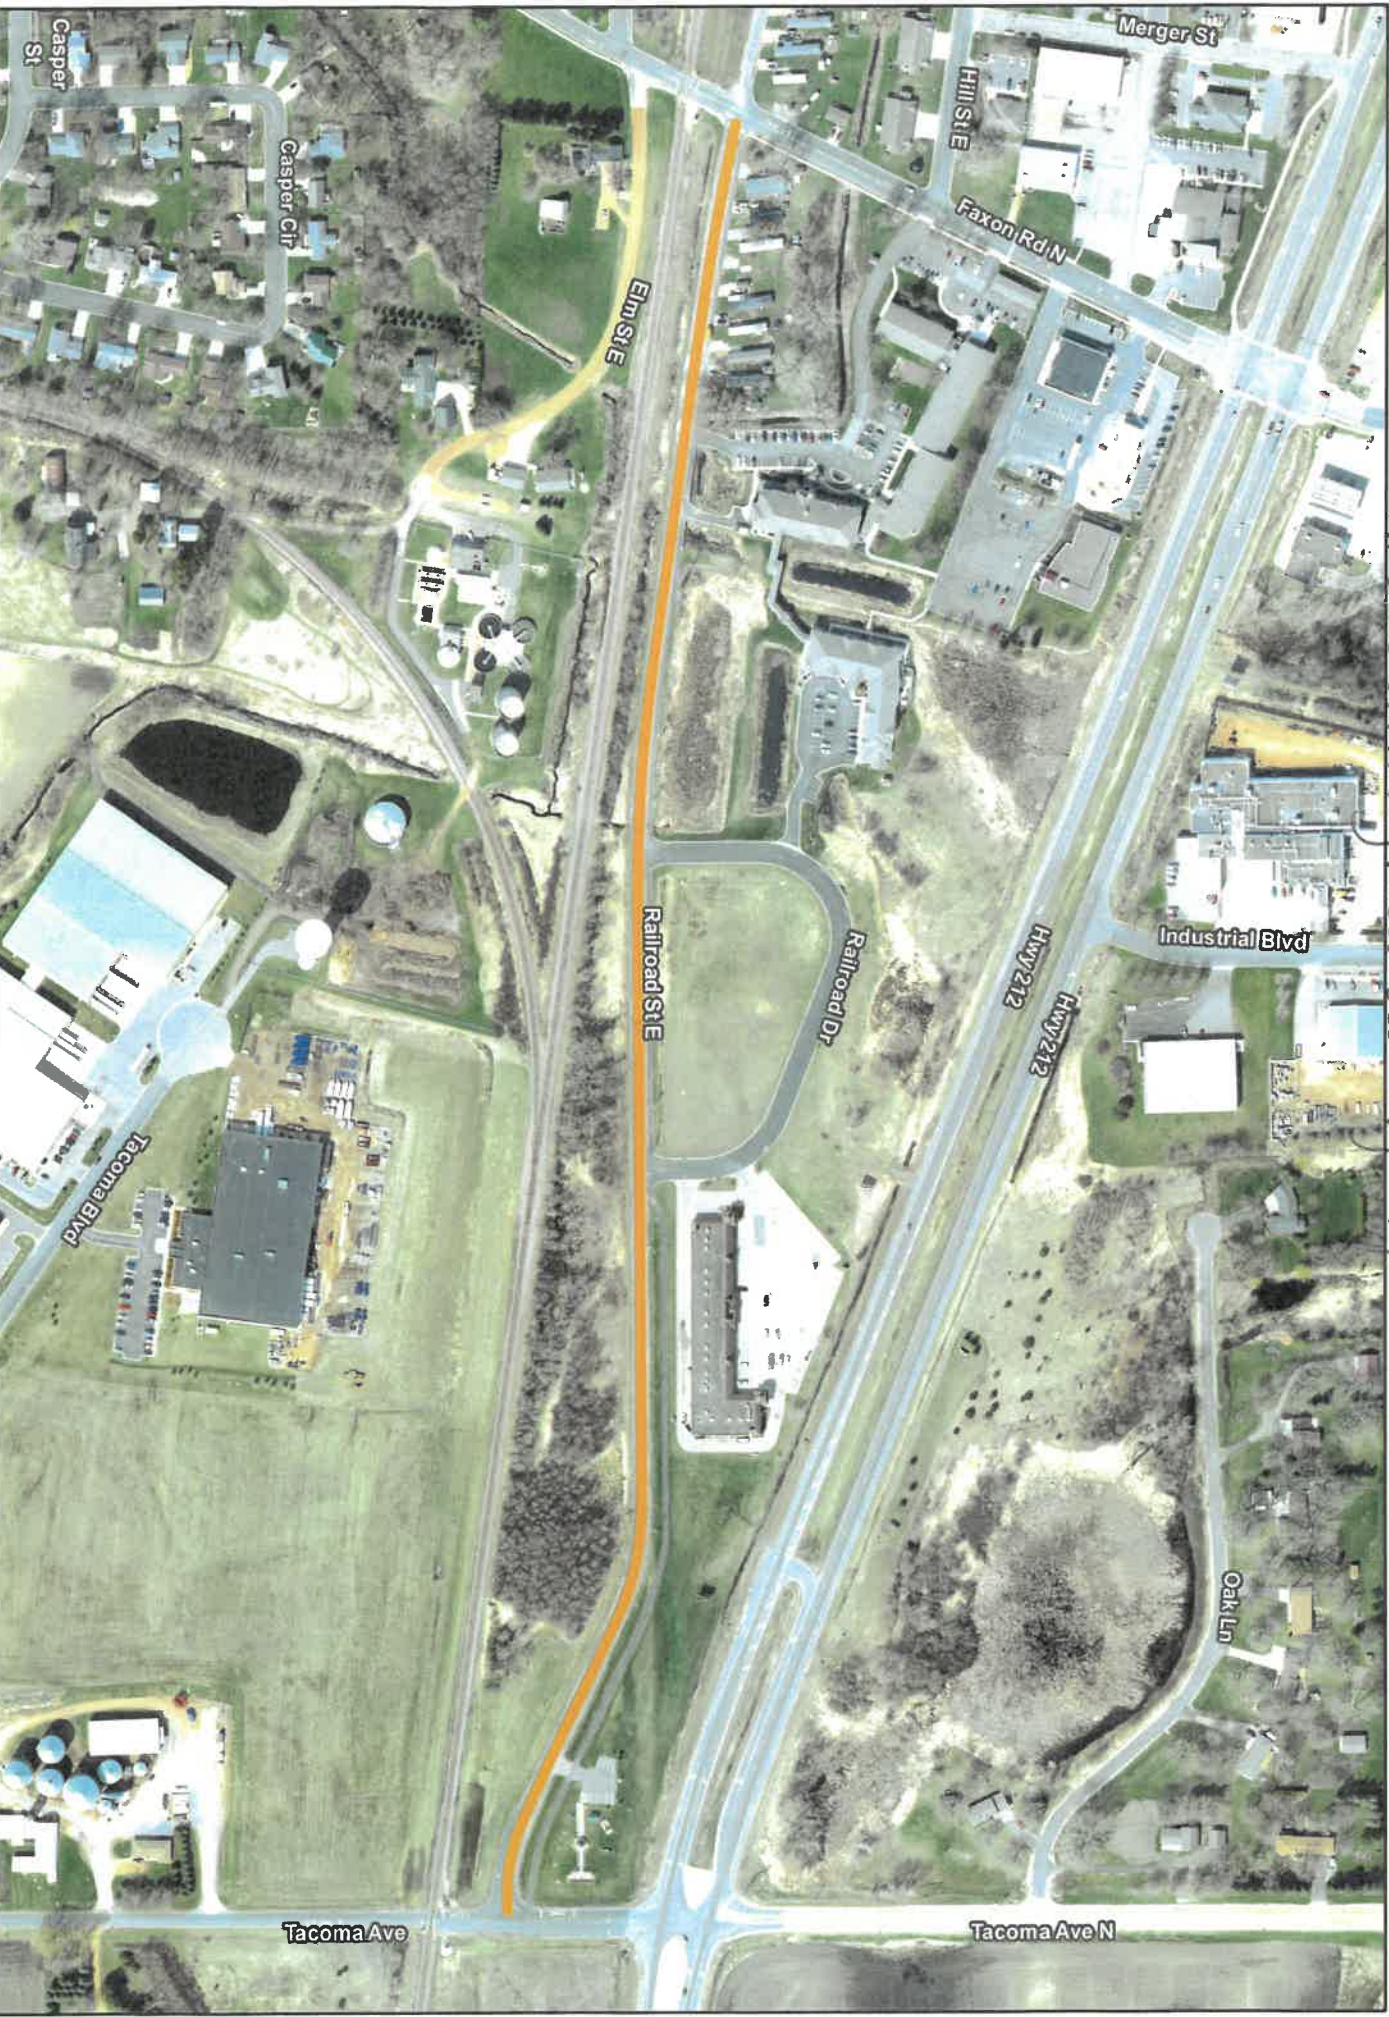



**CITY OF NORWOOD YOUNG AMERICA**  
**2023 Seal Coating - Sports Complex**  
Map Date: 4/3/2023

*\* Crack Filling & Seal Coating Map*





**CITY OF NORWOOD YOUNG AMERICA**  
**2023 Seal Coating - Legion Park**

Map Date: 4/3/2023

*\*Crack Filling & Seal Coating Map*



2023 Road Maintenance

